
Power Strips



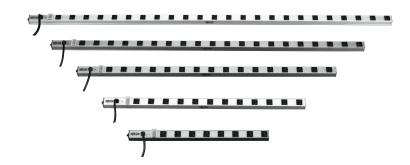

Description

Tripp Lite's line of multiple-outlet Power Strips are ideal for mounting inside rack enclosures, on walls, workbenches, or in laboratory environments. These strips are rated for 120 volts and come equipped with 15 or 20 amp resettable circuit breaker (depending on model). Models are available in 2, 3, 4, 5, and 6 ft. lengths and all have a 15 ft. cord with plug styles varying by model. UL and cUL listed, these vertical power strips are constructed of high-strength extruded aluminum housing, include mounting tabs and feature a lighted/transparent on/off switch cover to prevent accidental turn-off. Lifetime product replacement warranty. Tripp Lite warrants its products to be free from defects in materials and workmanship for varying periods from the initial date of purchase.

Key Buying Points

- Power strip outlets available in various configurations—including 15 & 20 amp models; 15 ft. cord
- · Available with 15 or 20 amp re-settable circuit breakers, depending on unit
- Lighted power switch enclosed within a clear switch guard to prevent accidental turn-off
- Sturdy metal housing stands up to demanding work environments
- Lifetime Tripp Lite product replacement warranty

Typical Applications

Multi-outlet power distribution unit is the ideal means of powering multiple loads in 19-inch rackmount, wallmount and undercounter applications, such as internetworking, PC systems, telecommunications, audio/video, security, sound reinforcement and more. Ideal for distribution of UPS, generator or commercially derived AC power to protected equipment.

Power Strip Specifications

Power Strips							
Tripp Lite Model #	PS2408	PS3612	PS4816	PS6020	PS7224	PS7224-20	PS7224-20T
Tech Data Part #	880883	880884	880885	880887	880888	880889	880036
Electrical Rating	120V / 15A	120V / 15A	120V / 15A	120V / 15A	120V / 15A	120V / 20A	120V / 20A
Housing	High-strength extruded aluminum						
Color	Silver						
Form factor	Vertical power strip, includes mounting clips						
Overall length	24 in. / 2 ft.	36 in. / 3 ft.	48 in. / 4 ft.	60 in. / 5 ft.	72 in. / 6 ft.	72 in. / 6 ft.	72 in. / 6 ft.
Dimensions	1.5 x 1.5 x 24 in.	1.5 x 1.5 x 36 in.	1.5 x 1.5 x 48 in.	1.5 x 1.5 x 60 in.	1.5 x 1.5 x 72 in.	1.5 x 1.5 x 72 in.	1.5 x 1.5 x 72 in.
Shipping Weight	3.2 lbs.	3.8 lbs.	4.3 lbs.	5 lbs.	5.5 lbs.	6.5 lbs.	6.6 lbs.
Receptacle type / qty	8 Nema 5-15R	12 Nema 5-15R	16 Nema 5-15R	20 Nema 5-15R	24 Nema 5-15R	24 Nema 5-20R	24 Nema 5-20R
Receptacle spacing	2.5 inches	2.5 inches	2.5 inches	2.5 inches	2.5 inches	2.5 inches	2.5 inches
Circuit Breaker	15A	15A	15A	15A	15A	20A	20A
Switch	Lighted with transparent on/off switch cover to prevent accidental turn-off						
Cord length	15 feet						
Cord type	14/3 SJT	14/3 SJT	14/3 SJT	14/3 SJT	14/3 SJT	12/3 SJT	12/3 SJT
Cord color	Black						
Plug type	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-20P	Nema L5-20P Locking input Plug
Surge Suppression	None						
Approvals	UL / cUL						

[&]quot;The policy of Tripp Lite is one of continuous improvement. Specifications are subject to change without notice."